



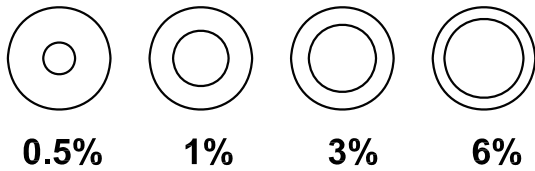


Style 888

- Durable, lightweight alloy construction
- Master stream nozzle with an inbuilt eductor
- Transforms a water monitor into a foam station without additional equipment
- Designed for use with Class A and B foam, including AFFF and fluoroprotein
- Configurable foam proportioning with pre-set options
- Combination of straight stream and variable fog patterns
- Interchangeable foam orifice inserts enable variable foam proportioning
- Metering capability of 1/2%, 1%, 3% or 6%
- 8' industrial grade pickup hose with quick connection coupling
- Optional drum pickup kit comes with 1m rigid PVC tube with shutoff capability and 8' pickup hose

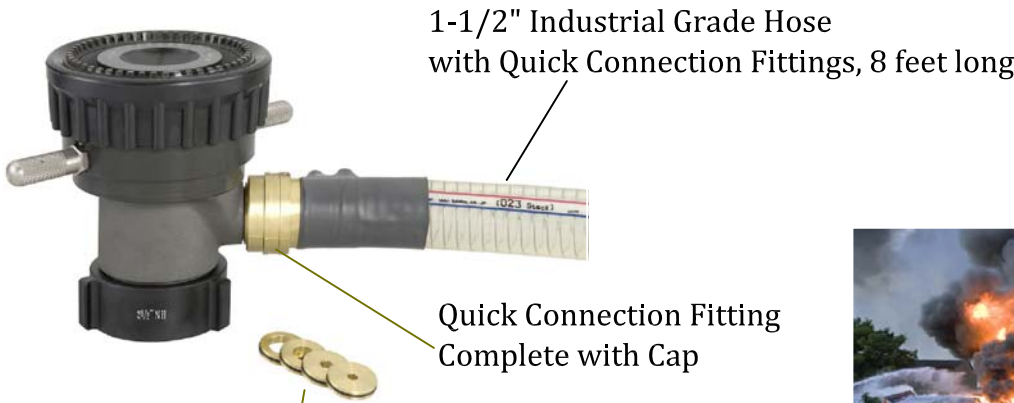

Foam Orifice Plates

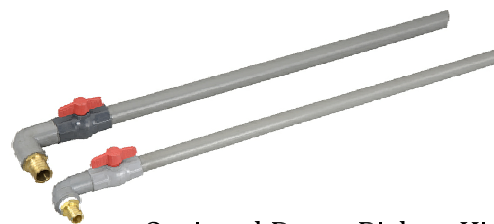

Optional Drum Pickup Kit

Compatible Protek Monitors								
611	612	633	649	655	736	622-1	622-2	622-3

Specification

Style	Material	Flow@100PSI (7bar)	Water Inlet	Foam Inlet	Proportioning	Length	Weight Lbs(kg)
888	Alloy	350, 500, 750 GPM (1325, 1900, 2900 LPM)	2-1/2" (65mm)	Quick Connection	1/2%, 1%, 3%, 6%	5.7" (145mm)	13.2 (6)