

SEKF-EDUCTING MONITOR NOZZLES




Style 881-BC

- Rugged, corrosion resistant brass construction.
- Master stream nozzle with an inbuilt eductor.
- Transform a water monitor into a foam station without additional equipment.
- Designed for use with Class A and B foam, including AFFF and fluoroprotein .
- Configurable foam proportioning with pre-set options.
- Combination of straight stream and variable fog patterns.
- Interchangeable foam orifice inserts enable variable foam proportioning.
- Metering capacity of 3% or 6% for 150 GPM.
- 9' industrial grade pickup hose with quick connection coupling and 15" stainless steel tube.
- Optional drum pickup kit comes with 1m rigid PVC tube with shutoff capability and 9' pickup hose.
- Optional isolation valve for shutoff capability



Standard 9' pickup hose and 15" stainless steel tube

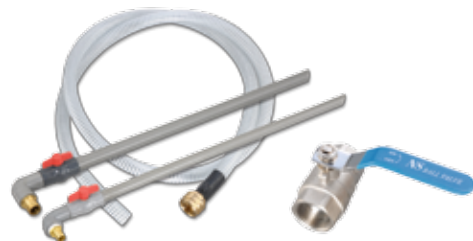

Optional drum pickup kit and isolation valve

Specification

Style	Material	Flow @100 PSI (7 bar)	Water Inlet	Foam Inlet	Proportioning	Length	Weight Lbs(kg)
881-BC	Brass	150 GPM (550 LPM)	1-1/2" or 2-1/2" (38mm or 65mm)	Quick Connection	3%, 6%	6.3" (160mm)	9.9 (4.5kg)