


SELF-EDUCTING MONITOR NOZZLE



Optional drum pickup kit and isolation valve


1-1/2" Industrial Grade Hose
with Quick Connection Fitting, 8 feet long

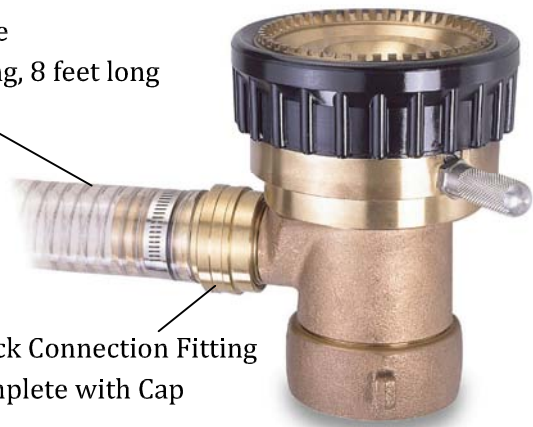

Quick Connection Fitting
Complete with Cap

Style 888-BC

- Rugged, corrosion resistant brass construction
- Master stream nozzle with an inbuilt eductor
- Spring loaded baffle facilitates versatile flow rate selection
- Transforms a water monitor into a foam station without additional equipment
- Designed for use with Class A and B foam, including AFFF and fluoroprotein
- Configurable foam proportioning with pre-set options
- Combination of straight stream and variable fog patterns
- Interchangeable foam orifice inserts enable variable foam proportioning
- Metering capability of 0.5%, 1%, 3% or 6%
- 8' industrial grade pickup hose with quick connection coupling
- Optional drum pickup kit comes with 1m rigid PVC tube with shutoff capability and 8' pickup hose
- Optional isolation valve for shutoff capability

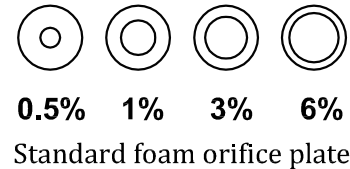

Specification

Style	Material	Flow@100PSI (7bar)	Water Inlet	Foam Inlet	Proportioning	Length	Weight Lbs(kg)
888-BC	Brass	350, 500, 750 GPM (1325, 1900, 2900 LPM)	2-1/2" (65mm)	Quick Connection	1/2%, 1% 3%, 6%	5.7" (145mm)	21.5 (9.8)